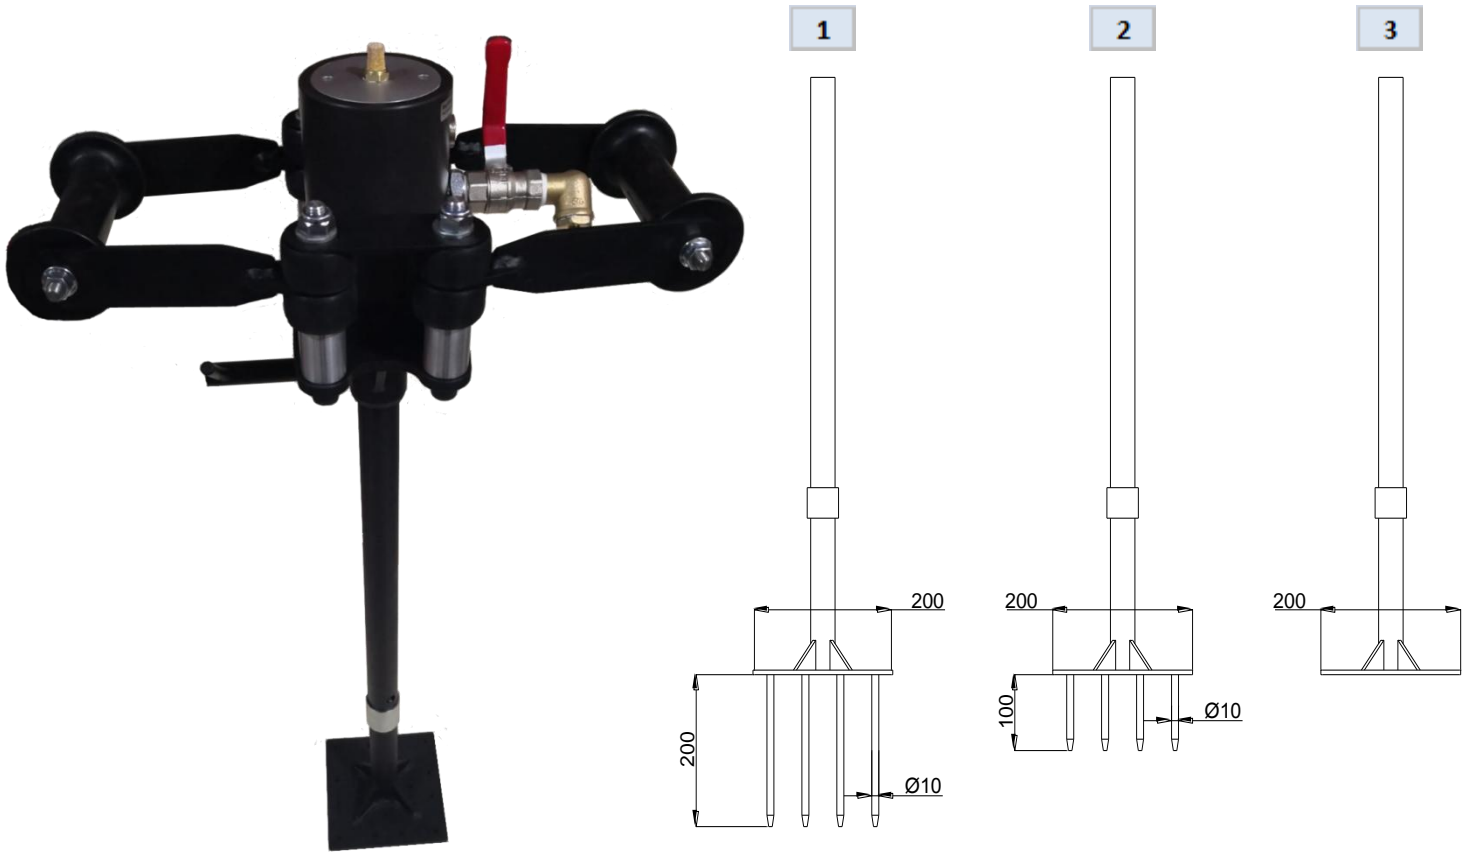


PNEUMATIC SPECIFICATIONS

Frequency (V.P.M.)			Force (N)			Air Consumption (L / min)			Noise dB (A)
2 bar	4 bar	6 bar	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar	
1950	2400	2700	610	1400	2170	90	160	270	80

WORKING PRESSURE : From 2 bar to 6 bar (from 29 psi to 87 psi). Lubricated and filtered air is required.


APPARATUS DIMENSIONS

Picture	Total Length (mm)	Plate size (mm)	Shank Diameter (mm)	Weight (kg)
1	955	200x200 (200mm 16 nails)	Ø35	4.7
2	855	200x200 (100mm 16 nails)	Ø35	3.7
3	755	200x200	Ø35	2.7

Features;

- Linear vibration
- Resistant against aggressive environmental conditions.
- Frequency and amplitude are adjustable separately.

Usage Area: Electric Arc Furnace bottom lining process.